

**FORWARD**

OUNCE WELL OS 40  
HORIZONTAL DIRECTIONAL DRILLING RIG



**FORWARD**

**DRILLING EQUIPMENT**

# **FORWARD**



## **OS.40 Horizontal Directional Drilling Rig**

OS.40 Horizontal Directional Drilling Rig is developed by the FORWARD Group primarily for the Asian Market.

Like all FORWARD machines, the OS.40 is manufactured using high-quality hydraulic components and offers hydraulic drive with huge power, using European and the United States of America brands.

The OS.40 machine is equipped with a variety of safety and protective measures for maximum ease and safety of operation and system reliability. The Operator console can rotate which gives better operator visibility, comfort and efficiency.


This Horizontal Directional Drilling Rig is compact in size allowing maximum working efficiency in even the smallest confined work-site area.

The FORWARD commitment to operator training and after sales service means that every local distributor works under the strictest factory guidance and training system.

The OS.40 Horizontal Directional Drilling Rig is ideal for Infrastructure Installation under Roads, Railway Lines, Buildings, Heritage Structures and Protected Natural Areas where Open Cut Excavation is not possible.

Many Industries are using Horizontal Directional Drilling Technology for Installation of Steel or HDPE Pipes, Cables and Conduits for Water, Oil & Gas, Electricity and Telecommunications. Make FORWARD Manufactured Horizontal Directional Drilling Rigs your first choice.



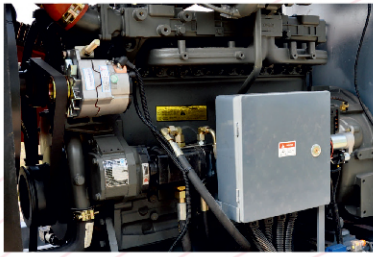

## Diesel Engine

Deutz Diesel Engine, a joint venture with the Weichai Company. Using a Six-Cylinder, Turbo-Charged, Water Cooled engine, renowned for its low wear and low emissions this engine offers maximum efficiency.



## Automatic Rod Handling Arm

The Automatic Rod Handling Arm system lifts each rod into the Rod Loading position for better Safety and speed of Rod Changing operation.



## Carriage

Carriage, Push and Pull-Back System utilizes a gear and rack (rack and pinion) system. Through a powerful reducer it can achieve maximum pushing and pulling power of 42 tonnes.



## Hydraulic System

All Hydraulic Parts are made in Europe or USA providing high quality and maximizing load capacity.



## Clamp

The Open Design means easier clamping to make Drill Rod Changing and Rod Break-Out much safer and easier.



## Track

OS.40 is equipped with a standard Excavator Chassis, with a Powerful Motor made in South Korea. This Excavator Mechanism is stable and strong for better manoeuvring and convenient maintenance.

## OUNCE WELL OS 40 HORIZONTAL DIRECTIONAL DRILLING RIG Main Technical Characteristics

Diesel Engine			
Model	Weichai-DEUTZ		
Power	176Kw		
Rotation			
Gears			2
	Low Speed	Speed of Rotation	90 RPM
		Torque of Spindle	16 000 Nm
	High Speed	Speed of Rotation	180 RPM
		Torque of Spindle	8 000 Nm
Thrust and Pullback			
Move Speed			2
	Low Speed	Force of Thrust	420KN
		Force of Pullback	420KN
	High Speed	Force of Thrust	210KN
		Force of Pullback	210KN
Other Parameters			
Drilling Angle		0-25°	
Power Winch	Jaws Clamping Spindle Torque		10 000 Nm
	Jaws Reducing Spindle Torque		20 000 Nm
Mud Pump	Maximum Capacity		450 L/min
	Maximum Pressure		10 Mpa
Drill Rod	Length		3 000mm
	Rod Lock		Φ88.5 mm
	Rod Body		Φ76 mm
	Max Bending		5%
	Weight		58 kg
Type of rod feeding (optionally)		Automatic rod hand/Rod handle/none	
Total Weight		12 000 Kg	
Dimensions (L×W×H)		6200×2250×2450mm	
Hydraulic anchor system		Optionally	
Rod box with rod feeding system		Optionally	